


# eternal material

A modern collection of textiles, metals and stones which create a soft, elegant look and feel.



Eternal Material 12422 | grey textured concrete



12252 | white stone LRV 65

12042 | granite stone LRV 49

12092   red lava stone LRV 55	12012   quartz stone LRV 20																		
<table border="1"> <tr> <td>Description</td> <td>Sheet vinyl</td> </tr> <tr> <td>Dimensions</td> <td>Roll width 2m Roll length 24-30.0m</td> </tr> <tr> <td>Total thickness</td> <td>ISO 1265 2.0mm</td> </tr> <tr> <td>Thickness sheet vinyl</td> <td>ISO 28346 0.7mm</td> </tr> <tr> <td>Collection size</td> <td>31</td> </tr> <tr> <td>Application</td> <td>EN 10824 Class 34/43</td> </tr> <tr> <td>CE</td> <td>EN 14041</td> </tr> <tr> <td>Reaction to fire</td> <td>EN 13501-1 B1-s1</td> </tr> <tr> <td>Slip resistance</td> <td>EN 13893 DS-50/30</td> </tr> </table>		Description	Sheet vinyl	Dimensions	Roll width 2m Roll length 24-30.0m	Total thickness	ISO 1265 2.0mm	Thickness sheet vinyl	ISO 28346 0.7mm	Collection size	31	Application	EN 10824 Class 34/43	CE	EN 14041	Reaction to fire	EN 13501-1 B1-s1	Slip resistance	EN 13893 DS-50/30
Description	Sheet vinyl																		
Dimensions	Roll width 2m Roll length 24-30.0m																		
Total thickness	ISO 1265 2.0mm																		
Thickness sheet vinyl	ISO 28346 0.7mm																		
Collection size	31																		
Application	EN 10824 Class 34/43																		
CE	EN 14041																		
Reaction to fire	EN 13501-1 B1-s1																		
Slip resistance	EN 13893 DS-50/30																		




12032 | coal stone LRV 11

12422 | grey textured concrete LRV 34



12492 | light textured concrete LRV 96

13002 | silver concrete LRV 34



4252 | mercury slate LRV 14

12612 | linen textile LRV 25




12442 | warm textured concrete LRV 22

12622 | steel textile LRV 11



10042 | graphite stucco LRV 22

13932 | grey woven LRV 24

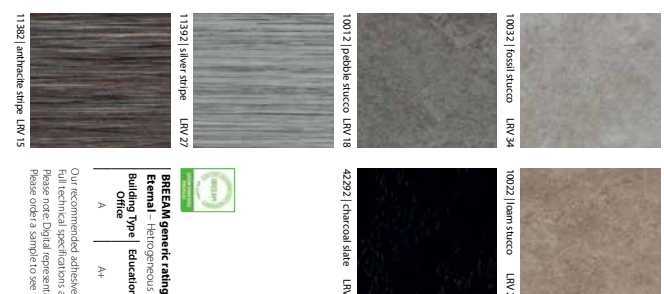

10012 | pebble stucco LRV 18

13942 | frost stripe LRV 61



10022 | beam stucco LRV 28

13922 | silver stripe LRV 27



13022 | anthracite concrete LRV 11

13922 | bamboo stripe LRV 31



13022 | light textured concrete LRV 96

11392 | anthracite stripe LRV 15



BREEM generic ratings					
Eternal - Heterogeneous PVC Floor Covering (EN649)					
Building Type	Education	Healthcare	Multi Residential	Retail (Durability)	Retail (Fashion)
Office	A	A+	A+	A	A+
	A	A+	A+	A	A+

Our recommended adhesive is S40 Eurosafe Special or 640 Eurostar Special. Full technical specifications are available at [www.etsos-flooring.co.uk/downloads](http://www.etsos-flooring.co.uk/downloads). Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact: 0800 751 2266.

