


surestep® mineral R10

Offered in five colour ways, this decorative design complements both small and large areas. A unique style where the chips in the transparent wear layer create depth and add refinement.

Specifications: R10, ESf, TRRL ≥ 36 , Rz ≥ 20 .



89922 | cloud



89952 | grape



LNIV 14



89922 | cloud



89922 | shadow



LNIV 19

Description	Sheet safety vinyl	
Dimensions	Roll width 2m	Roll length 20-27 m
Total thickness	ISO 1765	2.0mm
Thickness wear layer	EN ISO 24340	0.7mm
Collection size	5	
Application	EN 10874	Class 34/43
Slip resistance	EN 13845 Annex C	ESf
	DN 5130	R10
	TRRL Pendulum – Wet test – slider 96	≥ 36
	EN 14041	
Reaction to fire	EN 13501-1	B _s -s1
Slip resistance	EN 13893	DS ≥ 0.30

surestep® texture R10

A contemporary design with a textile appearance for a soft and elegant look and feel.

A textured embossing enhances the finish and all-over aesthetic of the product. The use of Step C Crystals ensures that the style is not compromised while ensuring safety floor functionality. Available in 5 colours.

Specifications: R10, ESf, TRRL ≥ 36 , Rz ≥ 20 .



89012 | linen

LNIV 30



89082 | felt


LNIV 15



89022 | cotton

LNIV 43

Description	Sheet safety vinyl	
Dimensions	Roll width 2m	Roll length 20-27 m
Total thickness	ISO 1765	2.0mm
Thickness wear layer	EN ISO 24340	0.7mm
Collection size	5	
Application	EN 10874	Class 34/43
Slip resistance	EN 13845 Annex C	ESf
	DN 5130	R10
	TRRL Pendulum – Wet test – slider 96	≥ 36
	EN 14041	
Reaction to fire	EN 13501-1	B _s -s1
Slip resistance	EN 13893	DS ≥ 0.30

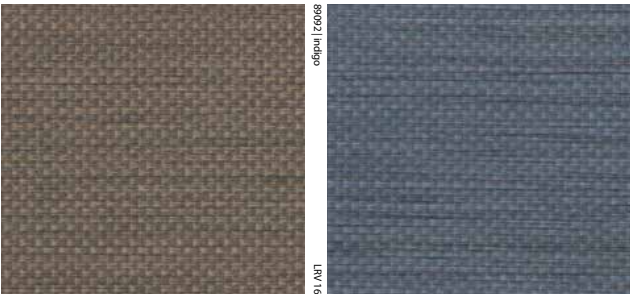

89022 | indigo

LNIV 16



89012 | leather

LNIV 16



BREEM generic ratings					
Step safety flooring - PVC Floor covering with enhanced slip resistance (EN13845)					
Building Type	Healthcare	Multi	Retail	Retail	Meets Sta
Office	Education	Residential	(Durability)	(Fashion)	criteria
A	A+	A+	B	A	A+

Our recommended adhesive is S40 Eurosafe Special or 640 Eurosafe Special. Full technical specifications are available at www.steps-flooring.co.uk/downloads. Please note Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact: 0800 751 1286.